

2017



EN ENGLISH
ENGLISCH
ANGLAIS

© Copyright Flexifinger QD Industries Inc. 2017 - All rights reserved
PRINTED IN GERMANY



Flexifinger® **FXA**®

PRODUCT BROCHURE



WWW.FLEXXIFINGER.COM

> SALES, SERVICE & SUPPORT

CALL:

Worldwide: +1-306-642-4555

Europe: +49 40-87408881

WEBSITE:

www.flexifinger.com

EMAIL:

communications@flexifinger.com

Flexifinger® **FXA®**
dealernetwork
FIND A DEALER



WE HAVE A CROP LIFTER FOR THAT

> PULSES

Lentils
Peas
Beans



> CEREALS

Wheat
Barley
Oats



> OILSEEDS

Canola
Mustard
Flax



> FORAGE

Hay
Alfalfa



> CORN



> SUNFLOWERS



> RELAY INTERCROPS



VISIT OUR WEBSITE FOR A COMPLETE PRODUCT LISTING

FIND THE RIGHT
CROP LIFTER



Flexxifinger® **FXA®**
WWW.FLEXXIFINGER.COM

> ADDITIONAL ACCESSORIES

These accessories are used to enhance the function and fit of Flexxifinger® Crop Lifters.

> CARRIAGE BOLTS



32310
Carriage bolt
7/16" tapering to 10mm for select headers with a poly-skid plate



32312
Carriage bolt
7/16" tapering to 10mm for select headers without a poly-skid plate



32314
Carriage bolt
Standard 10mm

> OTHER PARTS



32254-55
QD™ Nut Assembly
Installs on the header and used to attach all Flexxifinger® Crop Lifters to virtually any header



33080
Bean Lifting Pan
Pulls edible bean pods off the knife and helps to reduce shatter loss



40090
Offset Bracket Kit
Install a QD™ nut on any guard point on headers with 4"/10cm spacing between guards





SALES, SERVICE & SUPPORT

CALL:
Worldwide: +1-306-642-4555
Europe: +49 40-87408881

WEBSITE:
www.flexifinger.com

EMAIL:
communications@flexifinger.com

Flexifinger 
dealernetwork
FIND A
DEALER



HEAVY DUTY CROP LIFTER



For use in pulse, cereal, rice, oilseed, forage and other specialty crops in even ground conditions. Paired with the 33058, 33058P, 33060P or 33064P finger, sold separately.

LIFTER



70050
Heavy Duty Crop Lifter
Model N
Fits guards more than 146mm in length



70052
Heavy Duty Crop Lifter
Model J
Fits guards less than 146mm in length

COMPATIBLE NYLON FINGERS



33058
Nylon Finger
26x140mm



33058P*
Nylon Finger with pad
26x140mm



33060P*
Nylon Finger with pad
26x197mm



33064P*
Nylon Finger with pad
26x197mm, fibreglass core
*not recommended in wet or heavy soil

DFO™ CROP LIFTER



For use in high-yield cereal, oil, forage and other specialty crops in even ground conditions. Includes the 33064P nylon finger, which features a fibreglass core. Can also be paired with the 33058, 33058P or 33060P nylon finger, sold separately.

LIFTER



70040
DFO™ Crop Lifter
Model N
Fits guards more than 146mm in length
Includes spring steel tail and 33064P nylon finger



70042
DFO™ Crop Lifter
Model J
Fits guards less than 146mm in length
Includes spring steel tail and 33064P nylon finger

COMPATIBLE NYLON FINGERS



33058
Nylon Finger
26x140mm



33058P*
Nylon Finger with pad
26x140mm



33060P*
Nylon Finger with pad
26x197mm



33064P*
Nylon Finger with pad
26x197mm, fibreglass core
*not recommended in wet or heavy soil

FLEXXIFLOAT™ 250 CROP LIFTER



For use in cereal, some pulse, forage and other specialty crops in even and uneven ground conditions. Flexible spring pivot allows the arm and shoe to accommodate fluctuations in the ground level. Paired with the 20231, 20232, 20233, 20235 or 20236 FlexxiFloat™ Steel Shoe, sold separately.



LIFTER



73250
FlexxiFloat™ 250 Crop Lifter
Regular pivot model
Universal fit suitable for most rigid headers



74250
FlexxiFloat™ 250 Crop Lifter
High Pivot Model
Universal fit suitable for most flex headers

COMPATIBLE STEEL SHOES



20231
All-purpose shoe
Ideal for most soils and crops



20232
Floatation shoe
Ideal for sandy soil



20233
Small seed shoe
Ideal for pulses and small seed crops



20235
Long shoe
Ideal for cereal crops, some pulses and insect damaged crops



20236
Heavy shoe
Ideal for wet fields with heavy foliage or very irregular conditions

“One of the few things that actually work the way they’re supposed to. Maybe the best thing I’ve ever bought for the farm.”


- Clayton Schields, Asquith SK, Canada

FLEXXIFLOAT™ REGULAR PIVOT OR HIGH PIVOT WHICH IS THE RIGHT CHOICE?

The answer is fairly simple - the high pivot model is used on a flex header while the regular pivot model is used on a rigid header.

Here’s why: the pivot point of the high pivot model is angled higher. That means that when in flex mode with the header close to the ground, there’s less chance the pivot point will hit the ground before the guard or the tip of the lifter.

If the lifter is going to have to work on both rigid and flex equipment, the high pivot model can work on either one.

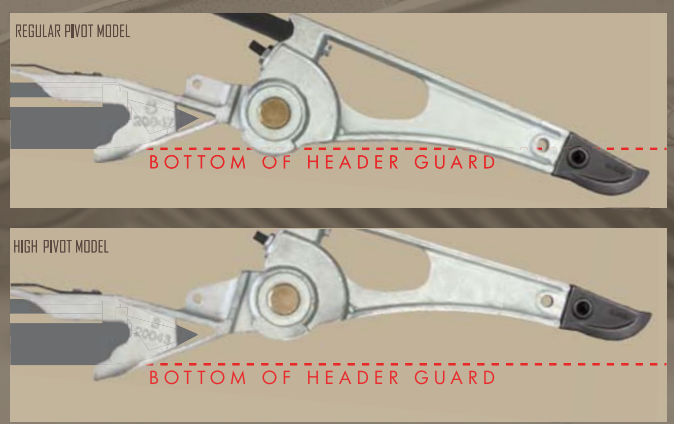

TRIPLE S™ EUROPEAN CROP LIFTER



For use in high-yield cereal crops. Highly adjustable eye strap pivot allows the operator to set the angle of the lifter. Universal fit and functions with virtually any header and guard system combination.



70400
Triple S™ European Crop Lifter
Universal fit

TRIPLE S™ MIDCUT™ CROP LIFTER



For use in high-yield cereal crops. Highly adjustable eye strap pivot allows the operator to set the angle of the lifter. Universal fit and functions with virtually any header and guard system combination. The Triple S™ MidCut™ is ideal for use in sawfly and wheat stem maggot damaged crops.



70402
Triple S™ MidCut™ Crop Lifter
Universal fit
Includes 33049 nylon finger



33049
Nylon Finger, MidCut™ (16 x 76mm)

TRIPLE S™ HIGHLIFT™ CROP LIFTER



For use in high-yield cereal crops. Highly adjustable eye strap pivot allows the operator to set the angle of the lifter. Universal fit and functions with virtually any header and guard system combination. Includes adjustable spring steel tail.



70406
Triple S™ HighLift™ Crop Lifter
Universal fit



SALES, SERVICE & SUPPORT

CALL:
Worldwide: +1-306-642-4555
Europe: +49 40-87408881

WEBSITE:
www.flexifinger.com

EMAIL:
communications@flexifinger.com

Flexifinger
dealernetwork
FIND A
DEALER



CORN & SUNFLOWER HARVEST PAN™



Use a grain draper header to harvest corn by attaching the Corn & Sunflower Harvest Pan™ to the guard with the patented Flexxifinger® QD™ System. Harvest sunflower and sesame using the Sunflower Conversion Kit, included.

HARVEST SOLUTION



70600

Corn & Sunflower Harvest Pan™
Suitable for 76mm guard systems
Includes Sunflower Conversion Kit

“We really like the [Flexxifinger® Corn & Sunflower Harvest Pans]. They do a great job in corn. We also used them to cut sunflowers[...] and they did a great job.”

- Michelle Jones, Broadview MT, USA



FLEXXISELECT™

RELAY INTERCROPPING HARVEST SYSTEM™



Eases the harvest of a relay intercrop by protecting the growing points of a pulse when harvesting the mature cereal. Attaches to the front point of either the FlexxiFloat™ 200 or FlexxiFloat™ 250 Crop Lifter. Patent pending.

HARVEST SOLUTION



70800

FlexxiSelect™ Relay Intercropping Harvest System
FlexxiFloat™ 200 or 250 sold separately

FlexxiSelect™

INTERCROPPING

2016 FIELD TEST RESULTS



VALPARAISO, IN, USA

Irrigation



WINTER WHEAT YIELD:
90 bu/ac[†] / 6.05 t/ha[†]

SOYBEAN YIELD:
62 bu/ac[†] / 4.17 t/ha[†]

REGENT, ND, USA

Dryland (with 4½"/114mm total seasonal rainfall)

SPRING WHEAT YIELD:
42 bu/ac[†] / 2.82 t/ha[†]

SOYBEAN YIELD:
23 bu/ac[†] / 1.55 t/ha[†]

[†]higher than monocropped averages in the region
[‡]consistent with monocropped averages in the region



The world's first rotary rock picker for skid steer use. Attaches using a Universal Quick Attach plate and requires standard hydraulic flow (26.5L) to operate. Clear rocks and debris between 5cm-76cm, depending on model.

ROCK PICKER



77102 Flexxifinger® Quicker Picker Model 800

Holds up to 907 kg of rocks or debris¹

¹based on rated operating capacity (ROC) of the skid steer loader


ADDITIONAL ACCESSORIES



Flexxifinger® Quicker Picker Model 800 Screens


Filter rocks or debris smaller than 2"/5cm
Fits around the outside of the drum

Available in the following sizing options²:




77150

6mm Perforated



77152

10mm Perforated




77154

13mm Perforated



77156

19mm Perforated



77168

25mm Mesh



77160

Solid

²Additional sizing options may be available upon request.

TECHNICAL SPECIFICATIONS

MODEL 800

Drum length	1219mm
Drum diameter	914mm
Capacity	up to 907kg
Drive	direct
Spin direction	Counterclockwise
Spindle size	114mm (9,072kg)
Rock size	5cm – 76cm
Unit weight	535kg
Loader lift required	1442kg
Hydraulic flow	27L/min
Hydraulic hose	13mm NPT
Hydraulic coupler	Flat Face couplers

"[The Flexxifinger® Quicker Picker] is clean and fast. All the soil is knocked off. The wagon is clean - there is just rocks."

Wayne Wendall, Eagle Bend MN, USA



SALES, SERVICE & SUPPORT

CALL:

Worldwide: +1-306-642-4555

Europe: +49 40-87408881

WEBSITE:

www.flexxifinger.com

EMAIL:

communications@flexxifinger.com

Flexxifinger®
dealernetwork
FIND A
DEALER



PICK WITH THE BEST



FLEXXIFINGER
QUICKER PICKER
ROCK PICKER

FLEXXIFINGER
CROP LIFTERS



LIFT WITH THE BEST

NEED HELP FINDING THE RIGHT **Flexifinger** **FXA** CROP LIFTER?



USE OUR INTERACTIVE PRODUCT SELECTOR

WWW.FLEXXIFINGER.COM

YOUR FLEXXIFINGER® DEALER:

Flexifinger **FXA**

CROP LIFTERS • ROCK PICKERS • HARVEST SOLUTIONS

+49 40-87408881

COMPLETE PRODUCT LISTING AVAILABLE ON OUR WEBSITE

WWW.FLEXXIFINGER.COM

